

The ideal business partner

Compact, lightweight and extremely versatile, the 1.6 litre APV Van is the perfect choice for light-commercial, freight or fleet businesses. It's big on the inside where it counts, big on power, and big on economy, with passenger car comfort and a host of features that make doing business easier. Spirited performance and all round utility ensure the APV Van offers real value for money while meeting the diverse needs of today's — and tomorrow's — business.



Comfort and safety go hand in hand

Get behind the wheel of an APV Van and you'll feel like you're in a wellappointed passenger car. Major controls and storage compartments are ideally placed for functionality. Keyless entry and air-conditioning provide comfort and convenience, while slide and recline-adjustable seats with adjustable headrests add to the comfort.

Dual SRS airbags are just part of the APV Van's safety package, with built in








Major Equipment

Air conditioning / Single CD audio system / Antenna / 2 speakers / 3-spoke urethane steering wheel / 3-position front cabin light / Sun visors with driver's-side ticket holder / Grey vinyl seats (slide and recline-adjustable) / Front passenger's access-support grip / Halogen headlamps / 2-speed front wipers / Front and rear mud flaps / Dual SRS airbags / 3-point ELR pre-tensioner seatbelt x 2 / Side-impact beams / High-mounted stop lamp / Hood lining / Power steering / Central door locking / Keyless entry / Front floor mats / Load area floor mat.

Dimensional Views

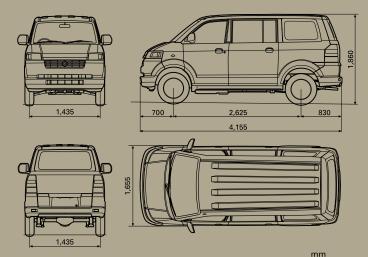

Exterior Colours







Tyres

Superior White Silky Silver Metallic

Radiant Red

SPECIFICATIONS

DIMENSIONS			
Overall length		mm	4,155
Overall width		mm	1,655
Overall height		mm	1,860
Wheelbase		mm	2,625
Track	Front	mm	1,435
	Rear	mm	1,435
Minimum Ground clearance		mm	180
Minimum turning radius		m	4.9
Load deck	Length	mm	2,005
	Width	mm	1,380
	Height	mm	1,230
WEIGHTS			
Curb weight		kg	1,140 - 1,165
Gross vehicle weight		kg	1,950
CAPACITIES			
Seating capacity (persons)			2
Fuel tank capaci	ty (litres)		43
ENGINE			
Туре			G16A
Displacement		СС	1,590
Bore x stroke		mm	75.0 x 90.0
Compression ratio			9.5:1
Maximum output		Kw/rpm	68/5,750
Maximum torque		Nm/rpm	127/4,500
Fuel distribution			Multi-point injection
TRANSMISSION			
Туре			5 speed manual
Gear ratio		1st	3.652
		2nd	1.947
		3rd	1.423
		4th	1.000
		5th	0.795
		Reverse	3.466
		Final	5.375
CHASSIS			
Steering			Rack and Pinion
Suspension		Front	MacPherson strut & coil spring
		Rear	Rigid axle & leaf spring
Brakes		Front	Ventilated discs
		Rear	Leading & trailing drums



185R14C